


Intelligent Technology

Permanent Magnet Intelligent Shielding Pump

永磁智能屏蔽泵

2024-2025

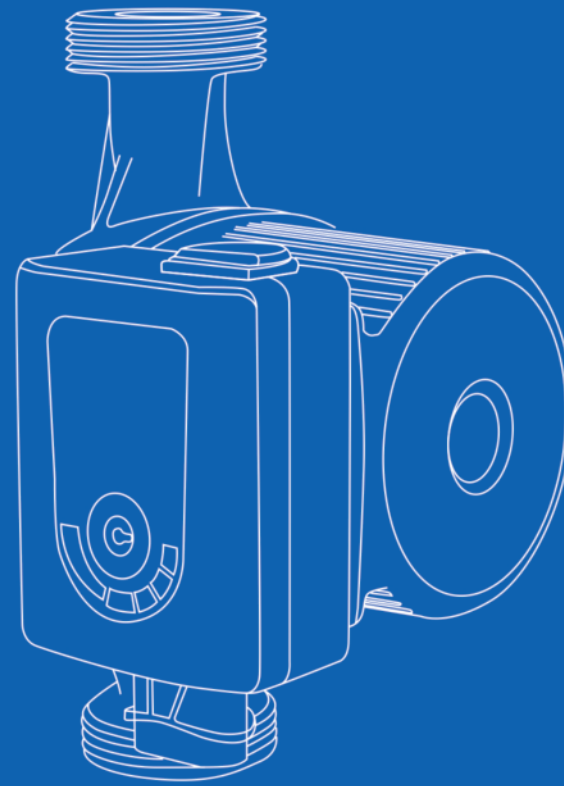

COMPASS INTERNATIONAL (NINGBO) LTD.


ADD: Floor 2, No. 2 Building, Silver Walk Street,
789 Middle Rili Road, Yinzhou District, 315199, Ningbo, China
TEL: 0086-574-83008927
[Http://www.compass-nb.com](http://www.compass-nb.com)
Email: sales@compass-nb.com

DAFU INTELLIGENT TECHNOLOGY CO., LTD.

ADD: No.3 Changyu Avenue, Zhejiang & Jiangxi Province Bilateral Cooperation
(QURAO) Demonstration Zone, Yushan County, Jiangxi Province.






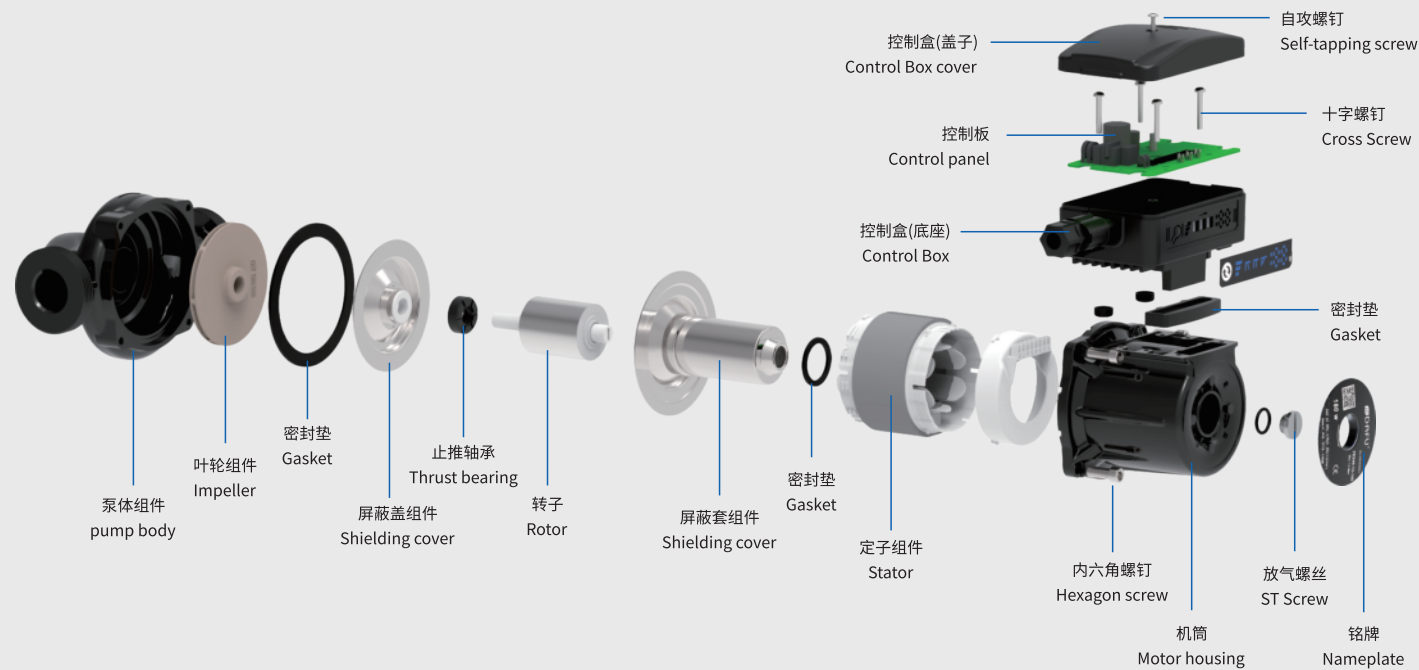

STRONG MANUFACTURING STRENGTH OUR PURSUIT OF QUALITY IS ALWAYS THE SAME

Dafu Pump Manufacturing Base is equipped with the most advanced CNC processing equipment and other kinds of processing equipment at home and abroad. It is one of the largest and most advanced pump manufacturers in China. By adopting modern equipment and management system, strictly controlling the production and manufacturing links, leading the international technical conditions and excellent manufacturing technology, the products have ensured the world leading level.



Permanent Magnet Intelligent Shielding Pump

CONTENTS

	LES 零冷水循环泵 Zero Cold Water Circulating Pump	01
	HES 永磁变频屏蔽泵 Permanent Magnet Variable Frequency Shield Pump	02-04
	FES 永磁变频屏蔽泵 Permanent Magnet Variable Frequency Shield Pump	05-06
	FES 永磁变频屏蔽泵 BIG FLOW SERIES Permanent Magnet Variable Frequency Shield Pump	07-08
	MES 永磁变频屏蔽泵 Permanent Magnet Variable Frequency Shield Pump	09-10
	CEH 永磁变频屏蔽泵 Permanent Magnet Variable Frequency Shield Pump	11-12
	KES 永磁变频屏蔽泵 Permanent Magnet Variable Frequency Shield Pump	13-14
	TE 永磁变频屏蔽泵 Permanent Magnet Variable Frequency Shield Pump	15-16
	BES 燃气壁挂炉专用泵 Gas Wall Mounted Furnace Special Pump	17-18
	BGS 燃气壁挂炉专用泵 Gas Wall Mounted Furnace Special Pump	19-20
	D/KPS 冷热水循环屏蔽泵 COLD AND HOT WATER CIRCULATION SHIELD PUMP	21-22
	D/KPS 冷热水循环屏蔽泵 COLD AND HOT WATER CIRCULATION SHIELD PUMP	23-24
	D/KPA 冷热水循环屏蔽泵 COLD AND HOT WATER CIRCULATION SHIELD PUMP	25-26



产品概述 Product overview

电源电压 Supply voltage: 1x230V-50/60Hz
最高扬程 Head rate, Hmax: 1.8m
最大流量 Flow rate, Qmax: 0.7m³/h
液体温度 Liquid temperature: +2°C to +95°C (TF95)
功率范围 Power Range: 8W
环境温度 Ambient temperature: 0°C to +40°C
外壳防护等级 Enclosure protection class: IPX4D
绝缘等级 Insulation class: H




LES

零冷水循环泵
Zero Cold Water Circulating Pump

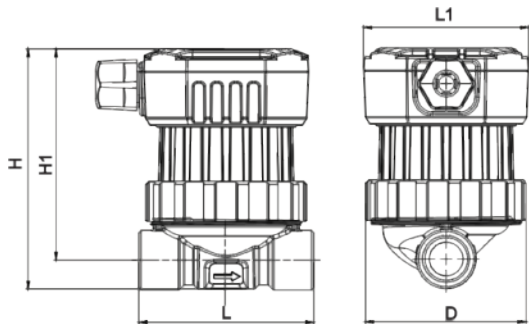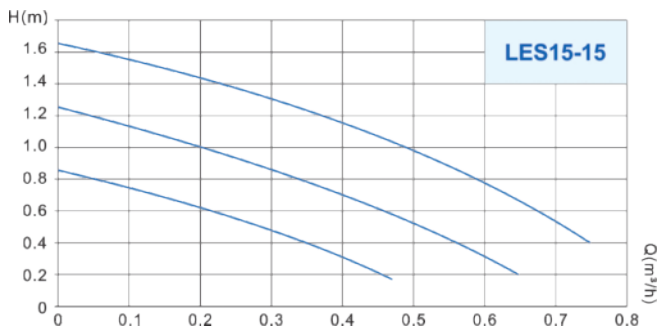

型号 Model	功率 Power (W)	最大流量 Flow MAX (m³/h)	最高扬程 Head Max (m)	进出口口径 Pump connection	L (mm)	L1 (mm)	H (mm)	H1 (mm)	D (mm)
LES15-15	8	0.7 m³/h	1.8m	G3/4"	78±1	89±1	106±1	92±1	72±1



变频
frequency conversion



高效叶轮
High efficiency impeller



屏蔽电动机
Shielded motor



低噪音
Low noise



陶瓷轴承
Ceramic bearing




HES


永磁变频屏蔽泵
Permanent Magnet Variable Frequency Shield Pump

产品概述 Product overview

电源电压 Supply voltage: 1x230V-50/60Hz
最高扬程 Head rate, Hmax: 4-7-8-10m
最大流量 Flow rate, Qmax: 2.5-4-6m³/h
液体温度 Liquid temperature: +2°C to +95°C (TF95)
功率范围 Power Range: 25-45-65-90W
环境温度 Ambient temperature: 0°C to +40°C
外壳防护等级 Enclosure protection class: IP44
具有PWM功能: With PWM function: PWM-H & PWM-D
绝缘等级 Insulation class: H
EEI≤0.21

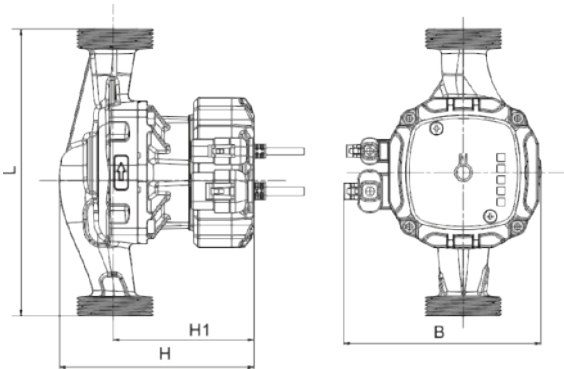

性能曲线 Performance Curve

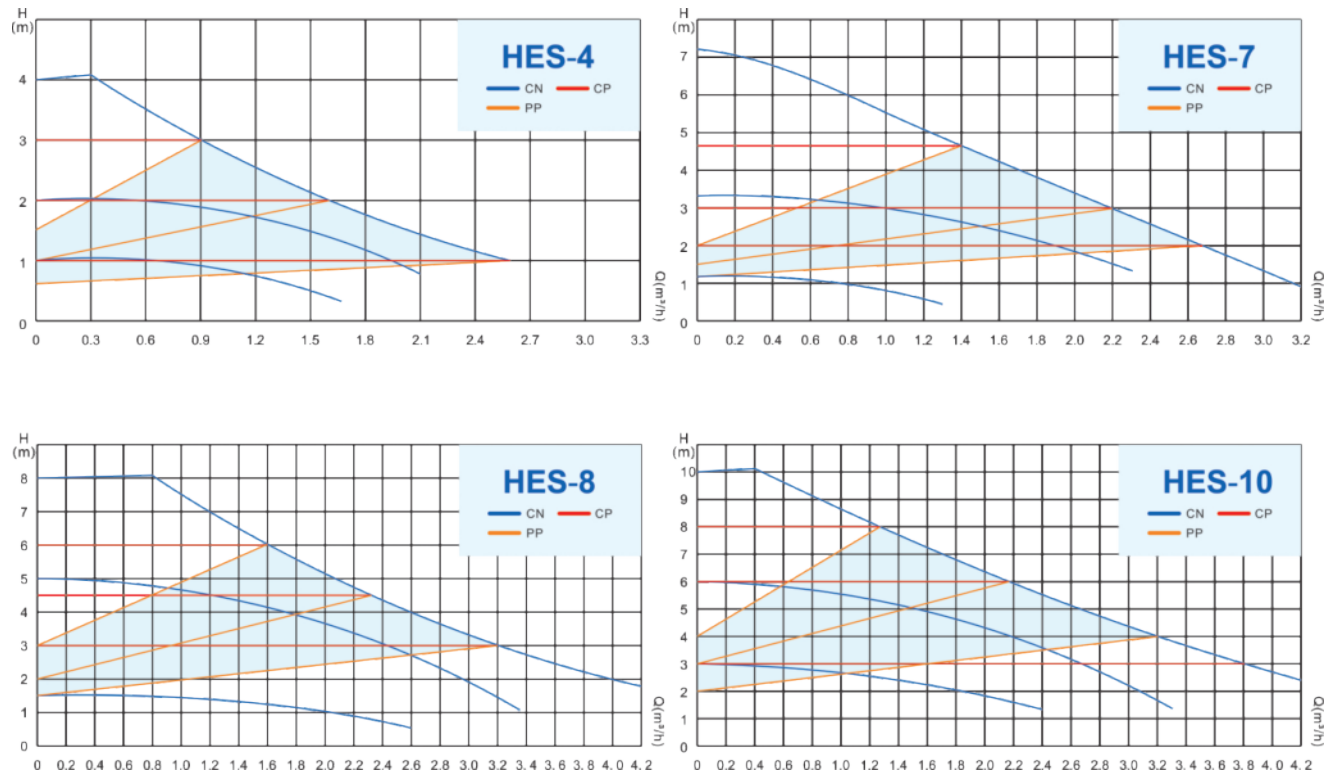

技术参数 Technical Parameter

型号 Model	功率 Prower (W)	最大流量 Flow MAX (m³/h)	最高扬程 Head Max (m)	进出口口径 Pump connection	L (mm)	B (mm)	H (mm)	H1 (mm)
HES25-4-130	25	2.5	4	G1 1/2"	130	125	135	100
HES25-4-180	25	2.5	4	G1 1/2"	180	125	135	100
HES32-4-180	25	2.7	4	G2"	180	125	135	100
HES25-7-130	45	3.2	7	G1 1/2"	130	125	135	100
HES25-7-180	45	3.2	7	G1 1/2"	180	125	135	100
HES32-7-180	45	3.4	7	G2"	180	125	135	100
HES25-8-130	65	4.2	8	G1 1/2"	130	125	135	100
HES25-8-180	65	4.2	8	G1 1/2"	180	125	135	100
HES32-8-180	65	4.4	8	G2"	180	125	135	100
HES25-10-130	90	4.4	10	G1 1/2"	130	125	135	100
HES25-10-180	90	4.4	10	G1 1/2"	180	125	135	100
HES32-10-180	90	4.6	10	G2"	180	125	135	100




功能说明 Function

	恒速模式 Constant speed	恒速模式3档, 1档亮灯一次, 2档亮灯2次, 3档, 常亮 Constant speed, channel 3:lighting, channel 2:flashing 2 times,channel 1:flashing 1 time.
	恒压模式 Constant pressure	恒压模式3档, 1档亮灯一次, 2档亮灯2次, 3档, 常亮 Constant pressure, channel 3:lighting, channel 2:flashing 2 times,channel 1:flashing 1 time.
	比例模式 Proportion	比例模式3档, 1档亮灯一次, 2档亮灯2次, 3档, 常亮 Proportion, channel 3:lighting, channel 2:flashing 2 times,channel 1:flashing 1 time.
	自适应模式 Auto	常亮 Lighting
	通信H模式 H mode	常亮 Lighting
	通信D模式 D mode	闪烁 Flashing

PWM 模式技术指标 H 模式(供暖 PWM 模式)


Technical specification H mode (PWM Heating)

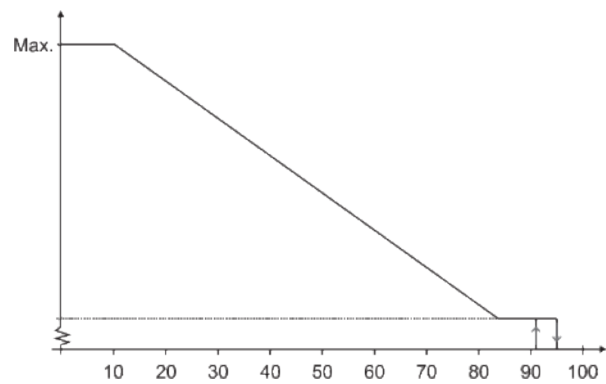

PWM 输入信号 (%) PWM input signal (%)	水泵状态 Pump condition
[0, 5]	水泵在最高速度下运行 The pump operates at maximum speed
[6, 85]	水泵线性从最高降到最低 The pump is linear from the highest to the lowest
[86, 88]	水泵在最低速度下运行 The pump operates at minimum speed
[89, 93]	如果输入信号的变速点附近波动, 根据磁滞原理会阻止泵的启动和停止 If the input signal fluctuates near the speed change point, it will prevent the pump from starting and stopping according to the principle of hysteresis
[94, 100]	水泵停止运行, 进入待机状态 The pump stopped running and standby

PWM 模式技术指标 D 模式(太阳能 PWM 模式)

Technical specification D mode (PWM Solar mode)

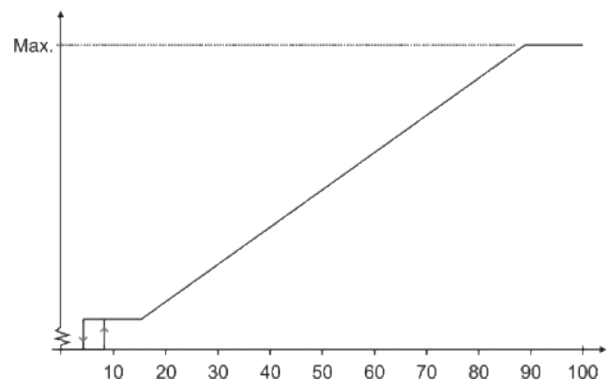

PWM 输入信号 (%) PWM input signal (%)	水泵状态 Pump condition
[0, 7]	待机, 水泵停止运行 Standby, pump stopped running
[8, 12]	如果输入信号的变速点附近波动, 根据磁滞原理会阻止泵的启动和停止 If the input signal fluctuates near the speed change point, it will prevent the pump from starting and stopping according to the principle of hysteresis
[13, 15]	水泵在最低速度下运行 The pump operates at minimum speed
[16, 95]	水泵线性从最高降到最低 The pump is linear from the highest to the lowest
[96, 100]	水泵在最高速度下运行 The pump operates at maximum speed



变频
frequency conversion



高效叶轮
High efficiency impeller



屏蔽电动机
Shielded motor



低噪音
Low noise



陶瓷轴
Ceramic bearing




FES



永磁变频屏蔽泵
Permanent Magnet Variable Frequency Shield Pump

产品概述 Product overview

- 电源电压 Supply voltage: 1x230V-50/60Hz
- 最高扬程 Head rate, Hmax: 4-7m
- 最大流量 Flow rate, Qmax: 2.2-3.6 m³/h
- 液体温度 Liquid temperature: +2°C to +95°C (TF95)
- 功率范围 Power Range: 25-45W
- 环境温度 Ambient temperature: 0°C to +40°C
- 外壳防护等级 Enclosure protection class: IP44
- 绝缘等级 Insulation class: H
- EEI≤0.20

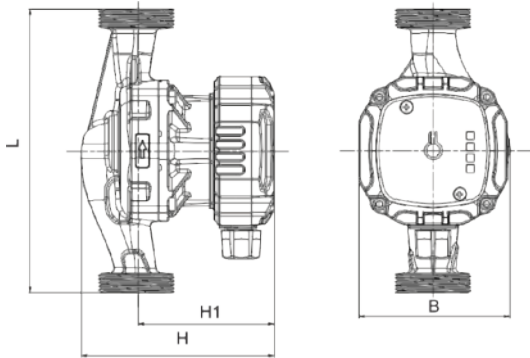

性能曲线 Performance Curve

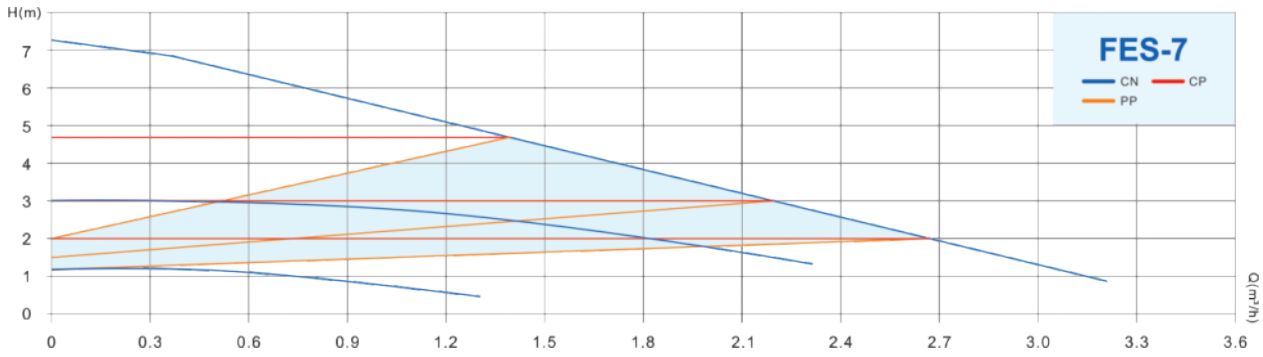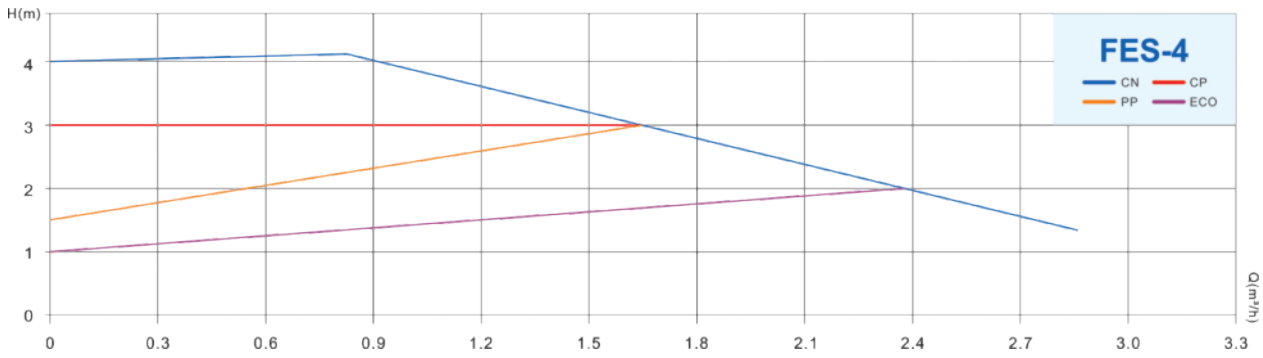

技术参数 Technical Parameter

型号 Model	功率 Power (W)	最大流量 Flow MAX (m³/h)	最高扬程 Head Max (m)	进出口口径 Pump connection	L (mm)	B (mm)	H (mm)	H1 (mm)
FES15-4-130	25	2.2	4	G1"	130	115	125	88
FES20-4-130	25	2.6	4	G1 1/4"	130	115	125	88
FES25-4-130	25	2.8	4	G1 1/2"	130	115	125	88
FES25-4-180	25	3.0	4	G1 1/2"	180	115	125	92
FES32-4-180	25	3.2	4	G2"	180	115	125	92
FES15-7-130	45	2.4	7	G1"	130	115	125	88
FES20-7-130	45	2.8	7	G1 1/4"	130	115	125	88
FES25-7-130	45	3.2	7	G1 1/2"	130	115	125	88
FES25-7-180	45	3.2	7	G1 1/2"	180	115	125	92
FES32-7-180	45	3.6	7	G2"	180	115	125	92



变频
frequency conversion



高效叶轮
High efficiency impeller



屏蔽电动机
Shielded motor



低噪音
Low noise



陶瓷轴
Ceramic bearing




FES

BIG FLOW SERIES




永磁变频屏蔽泵
Permanent Magnet Variable Frequency Shield Pump

产品概述 Product overview

电源电压 Supply voltage: 1x230V-50/60Hz
最高扬程 Head rate, Hmax: 8-10-12m
最大流量 Flow rate, Qmax: 6-8m³/h
液体温度 Liquid temperature: +2°C to +95°C (TF95)
功率范围 Power Range: 120-180W
环境温度 Ambient temperature: 0°C to +40°C
外壳防护等级 Enclosure protection class: IP44
绝缘等级 Insulation class: H
EEI≤0.23

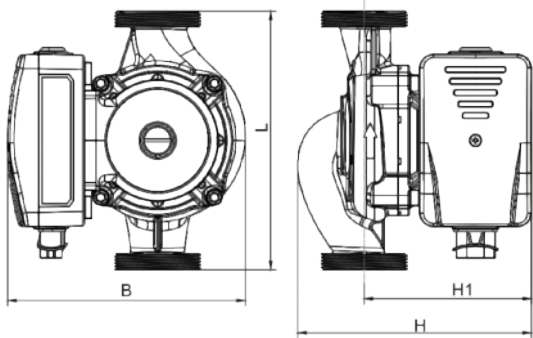

性能曲线 Performance Curve

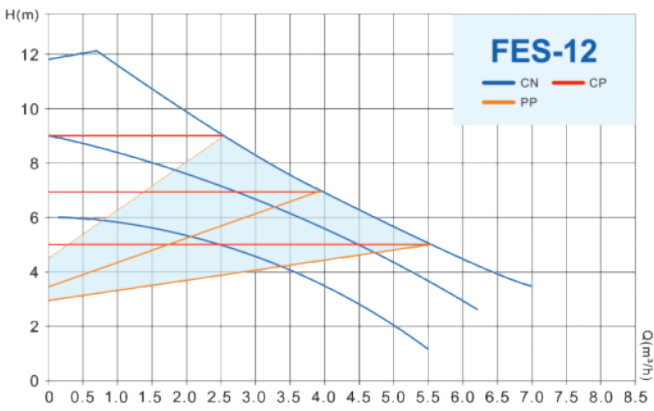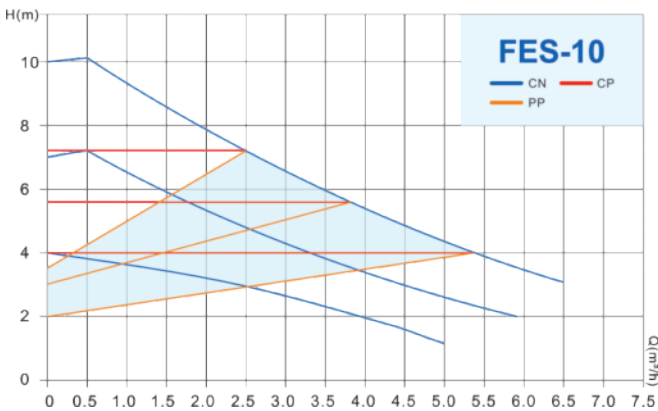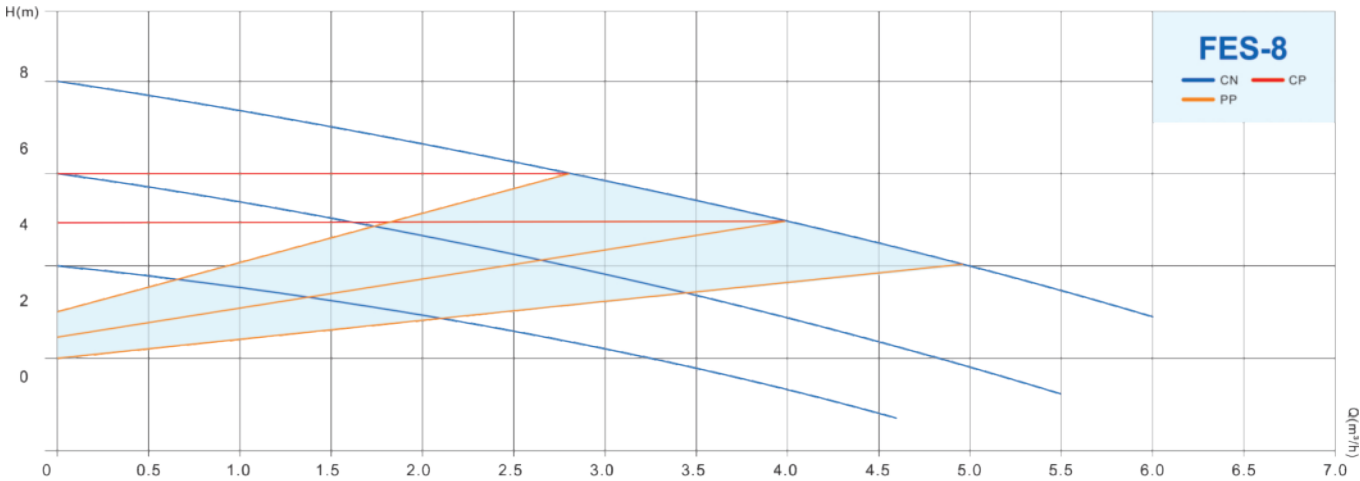

技术参数 Technical Parameter

型号 Model	功率 Power (W)	最大流量 Flow MAX (m³/h)	最高扬程 Head Max (m)	进出口口径 Pump connection	L (mm)	B (mm)	H (mm)	H1 (mm)
FES25-8-180	120	6	8	G1 1/2"	180	162	165	118
FES32-8-180	120	7	8	G2"	180	162	165	118
FES25-10-180	150	6.5	10	G1 1/2"	180	162	165	118
FES32-10-180	150	7.5	10	G2"	180	162	165	118
FES25-12-180	180	7	12	G1 1/2"	180	162	165	118
FES32-12-180	180	8	12	G2"	180	162	165	118



变频
frequency conversion



高效叶轮
High efficiency impeller



屏蔽电动机
Shielded motor



低噪音
Low noise



陶瓷轴
Ceramic bearing



MES

永磁变频屏蔽泵

Permanent Magnet Variable Frequency Shield Pump

产品概述 Product overview

电源电压 Supply voltage: 1x230V-50/60Hz

最高扬程 Head rate, Hmax: 4-6m

最大流量 Flow rate, Qmax: 2.2-4.2m³/h


液体温度 Liquid temperature: +2°C to +110°C

功率范围 Power Range: 28-80W



环境温度 Ambient temperature: 0°C to +40°C

外壳防护等级 Enclosure protection class: IP44

绝缘等级 Insulation class: H

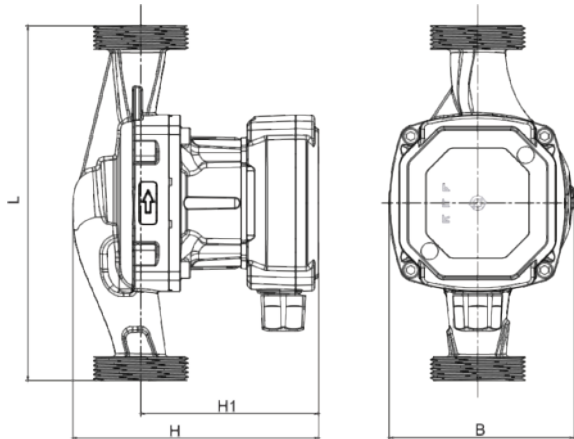

性能曲线 Performance Curve

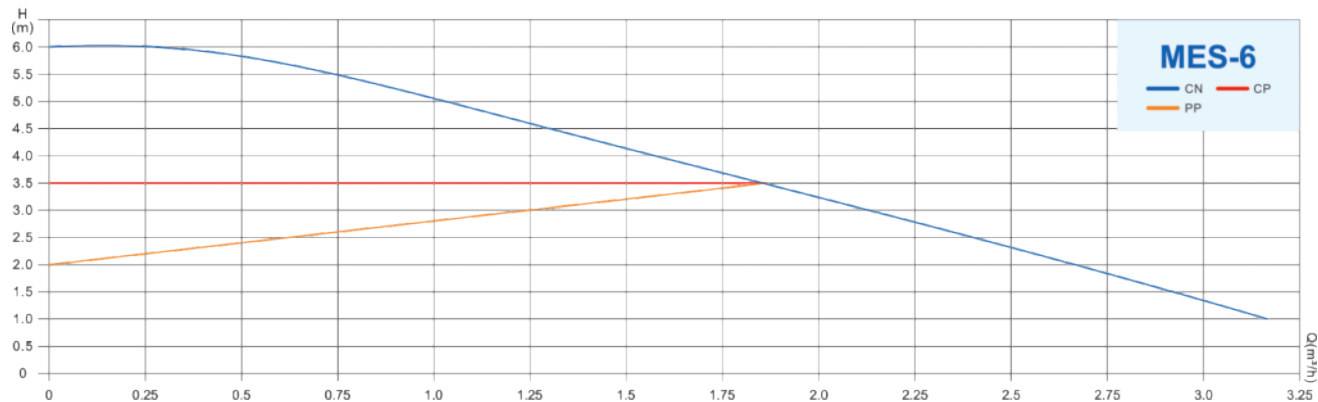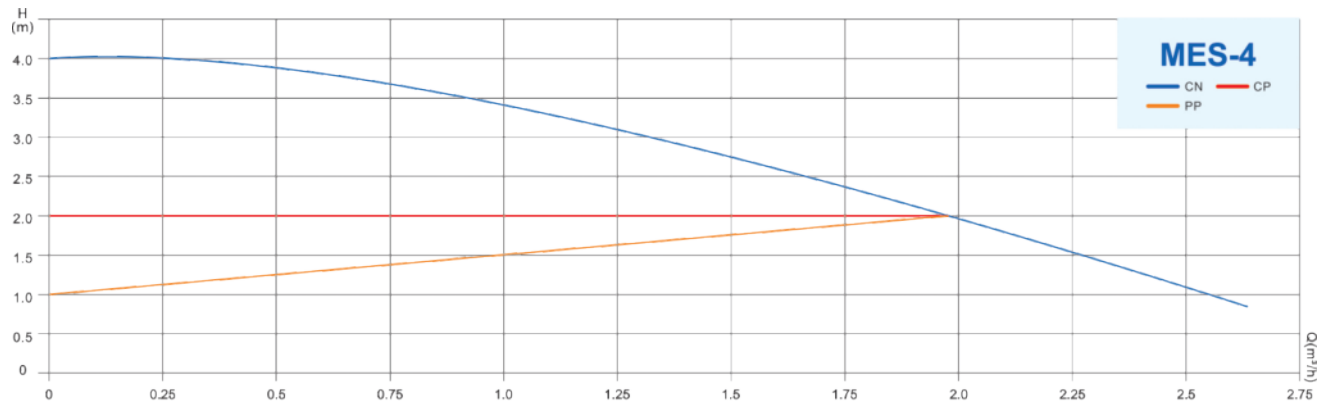

技术参数 Technical Parameter

型号 Model	功率 Power (W)	流量 Flow (m³/h)	扬程 Head (m)	进出口口径 Pump connection	L (mm)	B (mm)	H (mm)	H1 (mm)
MES15-4-130	28	2.2	4	G1"	130	94	125	90
MES25-4-130	28	2.6	4	G1 1/2"	130	94	125	90
MES25-4-180	28	2.6	4	G1 1/2"	180	94	125	90
MES32-4-180	28	2.8	4	G2"	180	94	125	90
MES15-6-130	45	2.8	6	G1"	130	94	125	90
MES25-6-130	45	3.2	6	G1 1/2"	130	94	125	90
MES25-6-180	45	3.2	6	G1 1/2"	180	94	125	90
MES32-6-180	45	3.4	6	G2"	180	94	125	90
MES15-8-130	65	3.2	8	G1"	130	94	125	90
MES25-8-130	65	3.6	8	G1 1/2"	130	94	125	90
MES25-8-180	65	3.6	8	G1 1/2"	180	94	125	90
MES32-8-180	65	3.8	8	G2"	180	94	125	90
MES15-10-130	80	3.4	10	G1"	130	94	125	90
MES25-10-130	80	4.0	10	G1 1/2"	130	94	125	90
MES25-10-180	80	4.0	10	G1 1/2"	180	94	125	90
MES32-10-180	80	4.2	10	G2"	180	94	125	90



CEH

永磁变频屏蔽泵

Permanent Magnet Variable Frequency Shield Pump

产品概述 Product overview

电源电压 Supply voltage: 1x230V-50/60Hz

最高扬程 Head rate, Hmax: 4-6-8m

最大流量 Flow rate, Qmax: 2.2-4.2m³/h

液体温度 Liquid temperature: +2°C to +95°C (TF95)


功率范围 Power Range: 28-65W

环境温度 Ambient temperature: 0°C to +40°C


外壳防护等级 Enclosure protection class: IP44

绝缘等级 Insulation class: H

EEI≤0.22

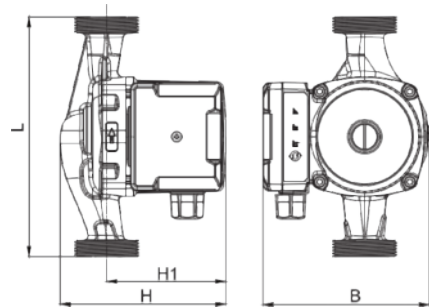

性能曲线 Performance Curve

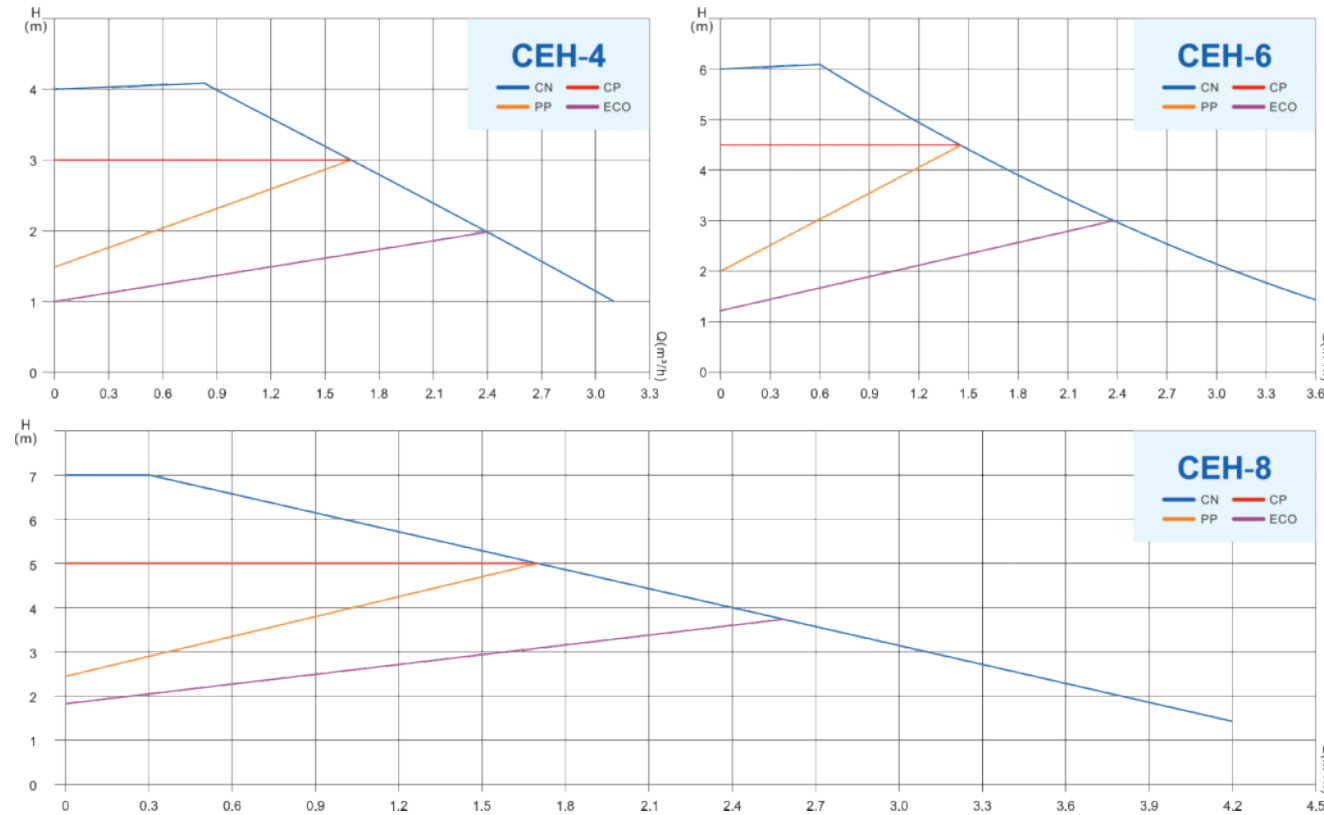

技术参数 Technical Parameter

型号 Model	功率 Power (W)	最大流量 Flow MAX (m³/h)	最高扬程 Head Max (m)	进出口口径 Pump connection	L (mm)	B (mm)	H (mm)	H1 (mm)
CEH15-4-130	28	2.2	4	G1"	130	126	126	98
CEH20-4-130	28	2.6	4	G1 1/4"	130	126	126	98
CEH25-4-130	28	3.0	4	G1 1/2"	130	126	126	98
CEH25-4-180	28	3.0	4	G1 1/2"	180	126	126	90
CEH32-4-180	28	3.2	4	G2"	180	126	126	90
CEH15-6-130	45	2.8	6	G1"	130	126	126	98
CEH20-6-130	45	3.2	6	G1 1/4"	130	126	126	98
CEH25-6-130	45	3.6	6	G1 1/2"	130	126	126	98
CEH25-6-180	45	3.6	6	G1 1/2"	180	126	126	90
CEH32-6-180	45	3.8	6	G2"	180	126	126	90
CEH15-8-130	65	3.2	8	G1"	130	126	126	98
CEH20-8-130	65	3.6	8	G1 1/4"	130	126	126	98
CEH25-8-130	65	4.0	8	G1 1/2"	130	126	126	98
CEH25-8-180	65	4.0	8	G1 1/2"	180	126	126	90
CEH32-8-180	65	4.2	8	G2"	180	126	126	90



变频
frequency conversion



高效叶轮
High efficiency impeller



屏蔽电动机
Shielded motor



低噪音
Low noise



陶瓷轴承
Ceramic bearing



KES

永磁变频屏蔽泵

Permanent Magnet Variable Frequency Shield Pump

产品概述 Product overview

电源电压 Supply voltage: 1x230V-50/60Hz

最高扬程 Head rate, Hmax: 4-6-8-10m

最大流量 Flow rate, Qmax: 2.2-2.8-3.2-4.4m³/h

液体温度 Liquid temperature: +2°C to +95°C (TF95)


功率范围 Power Range: 25-80W

环境温度 Ambient temperature: 0°C to +40°C





外壳防护等级 Enclosure protection class: IP44

绝缘等级 Insulation class: H

EEI≤0.23

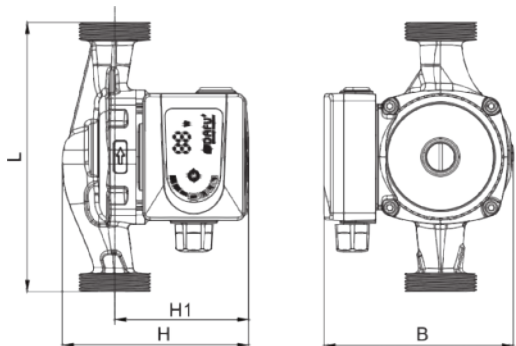


性能曲线 Performance Curve

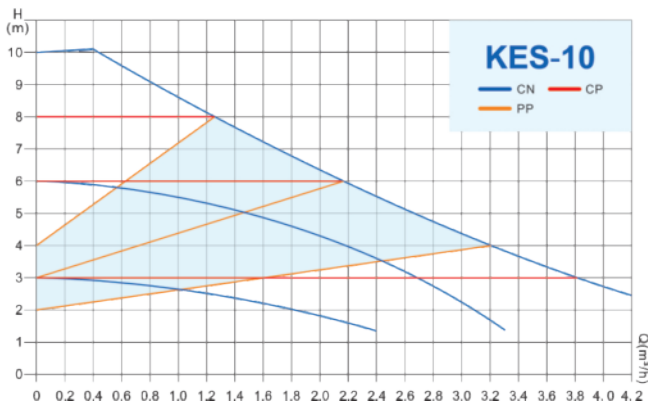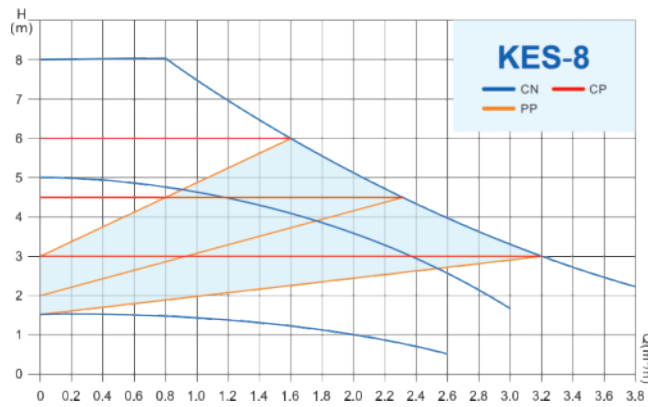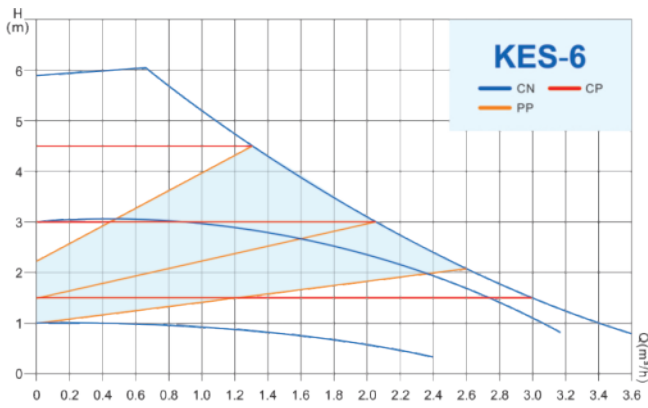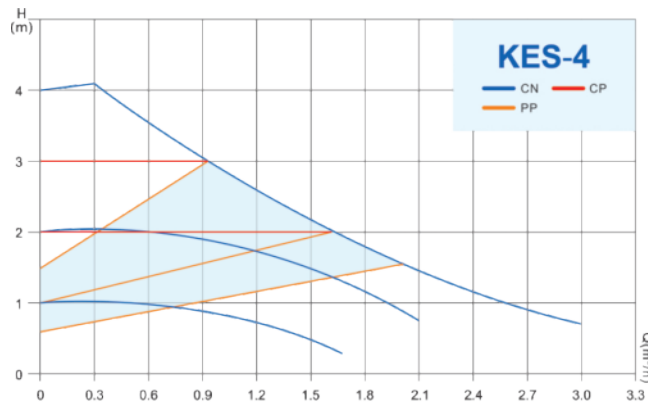

技术参数 Technical Parameter

型号 Model	功率 Power (W)	最大流量 Flow MAX (m³/h)	最高扬程 Head Max (m)	进出口口径 Pump connection	L (mm)	B (mm)	H (mm)	H1 (mm)
KES15-4-130	25	2.2	4	G1"	130	128	126	98
KES20-4-130	25	2.6	4	G1 1/4"	130	128	126	98
KES25-4-130	25	3.0	4	G1 1/2"	130	128	126	98
KES25-4-180	25	3.0	4	G1 1/2"	180	128	126	90
KES32-4-180	25	3.2	4	G2"	180	128	126	90
KES15-6-130	45	2.8	6	G1"	130	128	126	98
KES20-6-130	45	3.2	6	G1 1/4"	130	128	126	98
KES25-6-130	45	3.6	6	G1 1/2"	130	128	126	98
KES25-6-180	45	3.6	6	G1 1/2"	180	128	126	90
KES32-6-180	45	3.8	6	G2"	180	128	126	90
KES15-8-130	65	3.2	8	G1"	130	128	126	98
KES20-8-130	65	3.6	8	G1 1/4"	130	128	126	98
KES25-8-130	65	4.0	8	G1 1/2"	130	128	126	98
KES25-8-180	65	4.0	8	G1 1/2"	180	128	126	90
KES32-8-180	65	4.2	8	G2"	180	128	126	90
KES15-10-130	80	3.2	10	G1"	130	128	126	98
KES20-10-130	80	3.6	10	G1 1/4"	130	128	126	98
KES25-10-130	80	4.2	10	G1 1/2"	130	128	126	98
KES25-10-180	80	4.2	10	G1 1/2"	180	128	126	90
KES32-10-180	80	4.4	10	G2"	180	128	126	90



变频
frequency conversion



高效叶轮
High efficiency impeller



屏蔽电动机
Shielded motor



低噪音
Low noise



陶瓷轴
Ceramic bearing



永磁变频屏蔽泵
Permanent Magnet Variable Frequency Shield Pump




产品概述

电源电压:1 x 230 V-50/60 Hz
最高流量:6-8m³/h
最大扬程:20-30m
液体温度: +2°C至+95°C (TF 95)
功率范围:300-600W
环境温度:0°C至+40°C
外壳防护等级:IP 44
绝缘等级:H



Product overview

Supply voltage: 1x230V-50/60Hz
Flow rate, Qmax: 6-8m³/h
Head rate, Hmax: 20-30m
Liquid temperature: +2°C to +95°C (TF95)
Power Range: 300-600W
Ambient temperature: 0°C to +40°C
Enclosure protection class: IP44
Insulation class:H

外形及安装尺寸 Installation Dimension

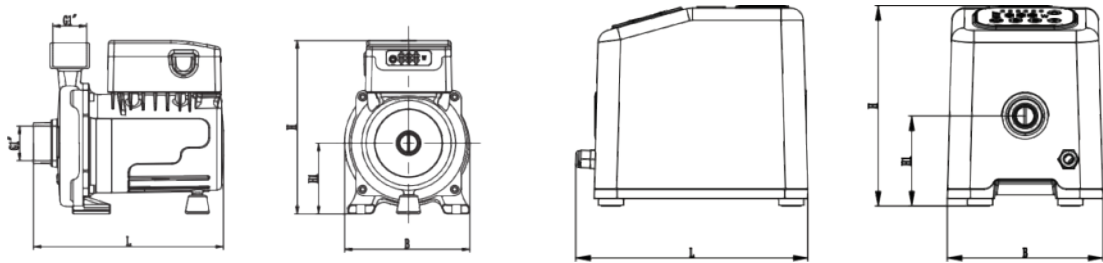


性能曲线 Performance Curve

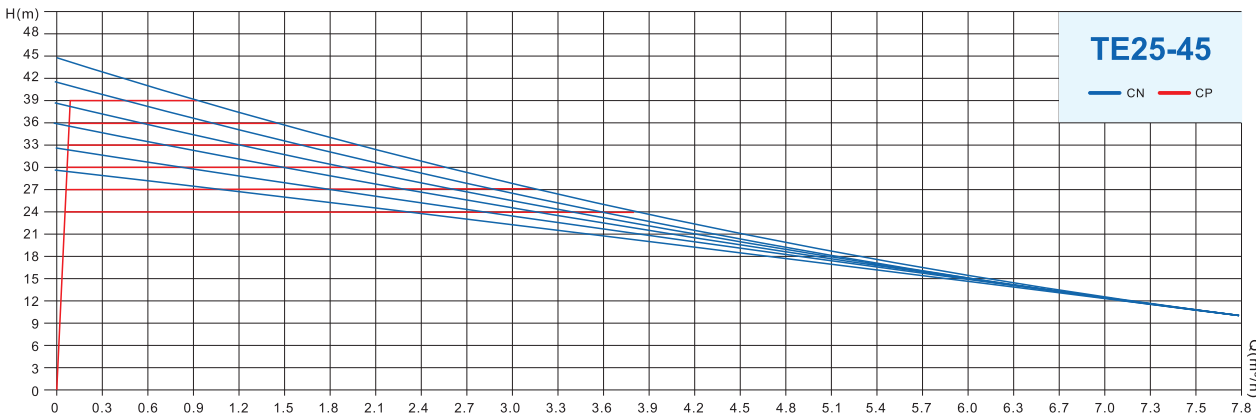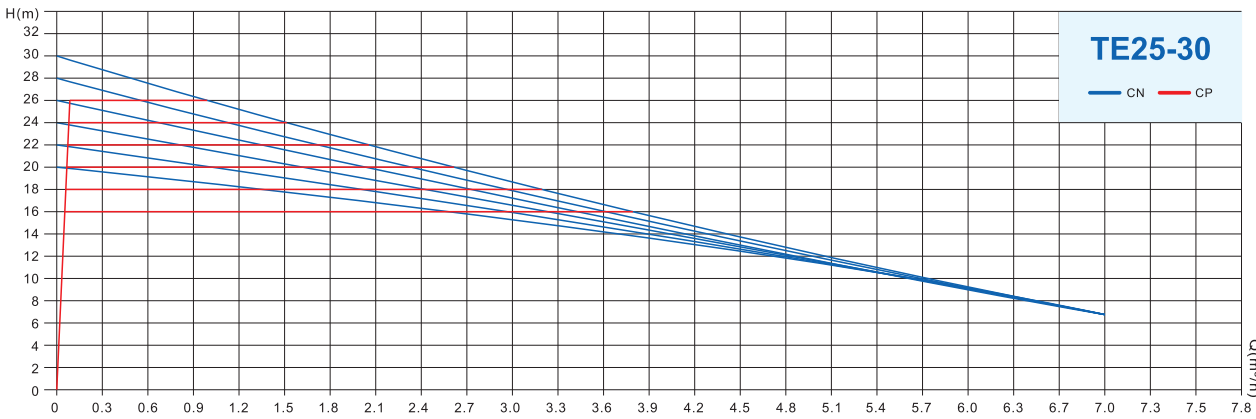

技术参数 Technical Parameter

型号 Model	功率 Power (W)	最大流量 Flow MAX (m³/h)	最高扬程 Head Max (m)	进出口口径 Pump connection	L (mm)	B (mm)	H (mm)	H1 (mm)
TE25-30	450	7	30	G1"	205	130	185	75
TE25-20H	300	6	20	G1"	189	210	141	173
TE25-30H	450	7	30	G1"	189	210	141	173
TE25-40H	600	8	40	G1"	248	169	206	93



变频
frequency conversion



高效叶轮
High efficiency impeller



屏蔽电动机
Shielded motor



低噪音
Low noise



陶瓷轴承
Ceramic bearing




BES




燃气壁挂炉专用泵
Gas Wall Mounted Furnace Special Pump

产品概述 Product overview

电源电压 Supply voltage: 1x230V-50/60Hz
最高扬程 Head rate, Hmax: 6-8-10m
最大流量 Flow rate, Qmax: 2.0-2.2-2.4m³/h
液体温度 Liquid temperature: +2°C to +95°C (TF95)
功率范围 Power Range: 45-65-80W
环境温度 Ambient temperature: 0°C to +40°C
外壳防护等级 Enclosure protection class: IP44
绝缘等级 Insulation class:H

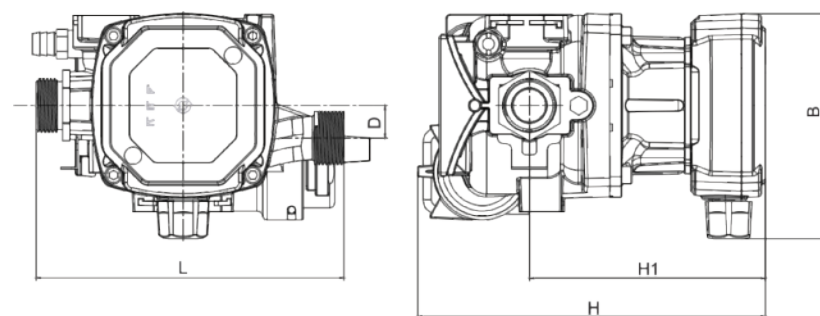

性能曲线 Performance Curve

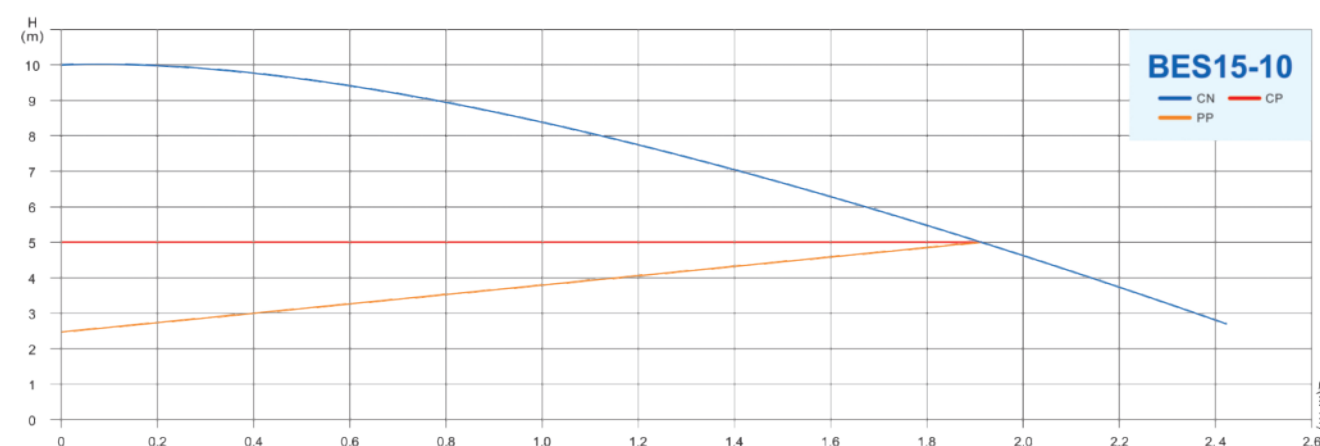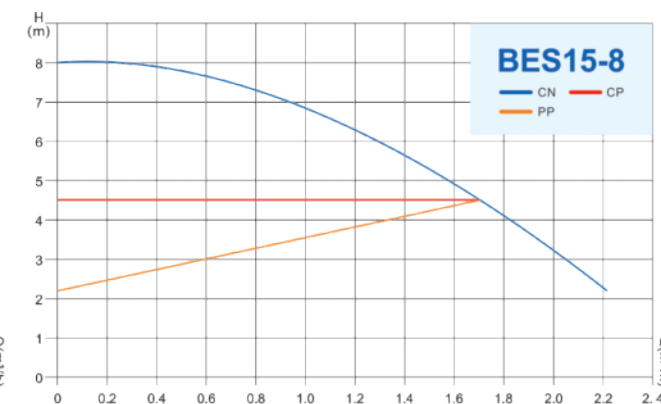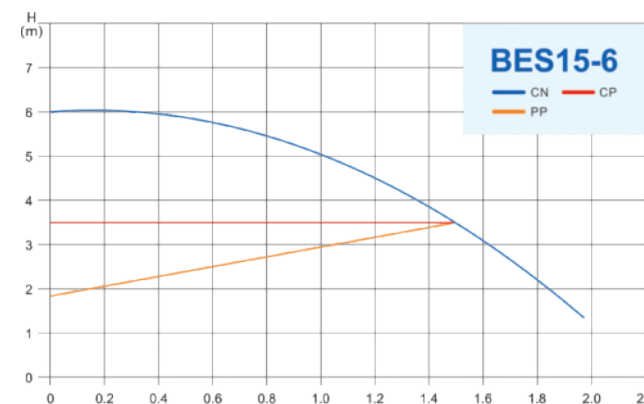

技术参数 Technical Parameter

型号 Model	功率 Power (W)	流量 Flow (m³/h)	扬程 Head (m)	进出口口径 Pump connection	L (mm)	B (mm)	H (mm)	H1 (mm)	D (mm)
BES15-6A	45	2.0	6	G3/4"	150	110	170	115	15.8
BES15-6B	45	2.0	6	G3/4"	150	110	170	115	15.8
BES15-8A	65	2.2	8	G3/4"	150	110	170	115	15.8
BES15-8B	65	2.2	8	G3/4"	150	110	170	115	15.8
BES15-10A	80	2.4	10	G3/4"	150	110	170	115	15.8
BES15-10B	80	2.4	10	G3/4"	150	110	170	115	15.8

电源:电压220V, 频率50HZ的单相交流电。样本中所列的产品曲线及性能参数仅代表220V,50HZ的产品性能。
Power supply :220V/50HZ, single-phase AC.The product parameters listed in the sample represent only 220V/50HZ.



BGS15-6A



BGS15-6B

BGS








燃气壁挂炉专用泵
Gas Wall Mounted Furnace Special Pump

产品概述




电源电压:1 x 230 V-50/60 Hz
最高流量:1.8-1.9-2.0m³/h
最大扬程:5-6-7m
液体温度: +2°C至+95°C (TF95)
功率范围:50-120W
环境温度:0°C至+40°C
外壳防护等级:IP 44
绝缘等级:H

Product overview

Supply voltage: 1x230V-50/60Hz
Flow rate, Qmax: 1.8-1.9-2.0m³/h
Head rate, Hmax: 5-6-7m
Liquid temperature: +2°C to +95°C(TF95)
Power Range: 50-120W
Ambient temperature: 0°C to +40°C
Enclosure protection class: IP44
Insulation class:H

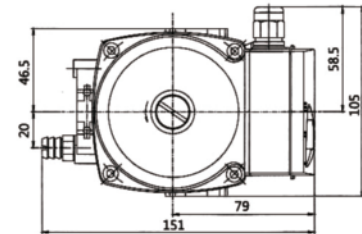

性能曲线 Performance Curve

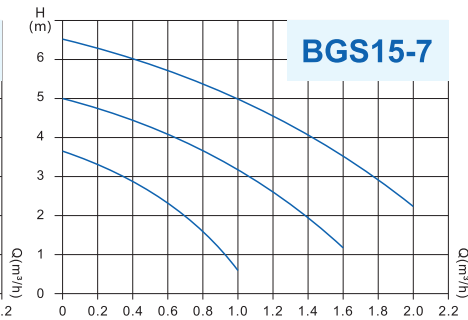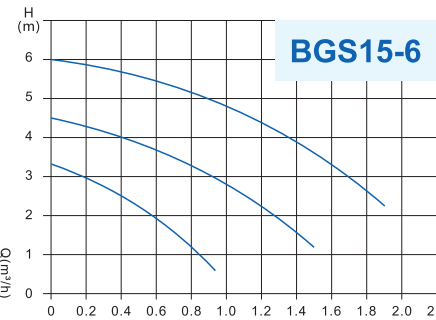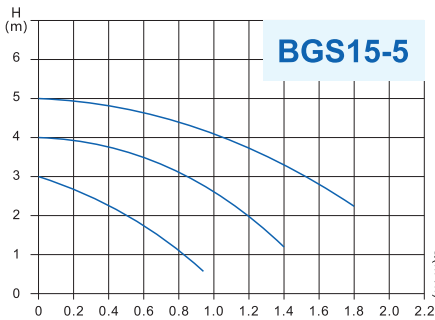

技术参数 Technical Parameter

型号 Model	功率 Power (W)	最大流量 Flow MAX (m³/h)	最高扬程 Head Max (m)	电流 Electric current(A)	进出口口径 Pump connection	毛重 weight (Kg)	外包装尺寸 Package size (cm)	包装 Package (pcs)
BGS15-5-A(B)	90/70/50	1.8/1.2/0.9	5.0/4/3	0.37	G3/4"	16.5	28.8x28x29.6	8
BGS15-6-A(B)	100/70/55	1.9/1.5/1.0	6.0/5/3.2	0.46	G3/4"	16.5	28.8x28x29.6	8
BGS15-7-A(B)	120/100/65	2.0/1.6/1.2	6.8/5.8/3.6	0.56	G3/4"	16.5	28.8x28x29.6	8



高效叶轮
High efficiency impeller

屏蔽电动机
Shielded motor

低噪音
Low noise

陶瓷轴
Ceramic bearing



D/KPS

冷热水循环屏蔽泵

COLD AND HOT WATER CIRCULATION SHIELD PUMP

产品概述 Product overview

电源电压 Supply voltage: 1x230V-50/60Hz

最高扬程 Head rate, Hmax: 4-6m

最大流量 Flow rate, Qmax: 1.2-3.6m³/h


液体温度 Liquid temperature: +2°C to +95°C (TF95)

功率范围 Power Range: 38-100W





环境温度 Ambient temperature: 0°C to +40°C

外壳防护等级 Enclosure protection class: IP44

绝缘等级 Insulation class:H

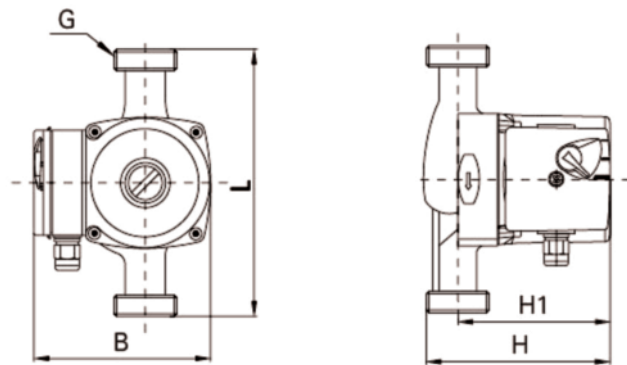

性能曲线 Performance Curve

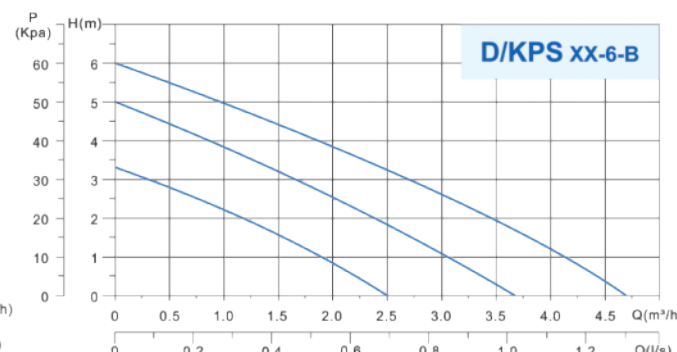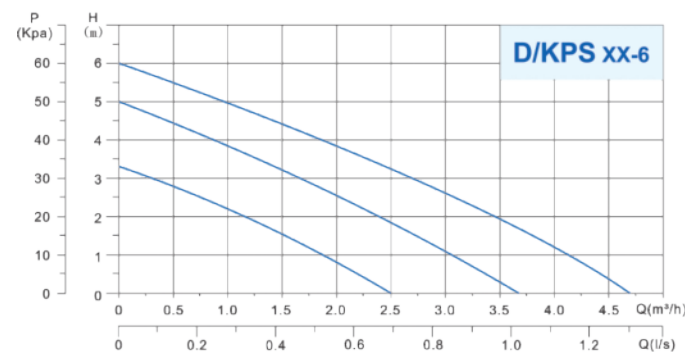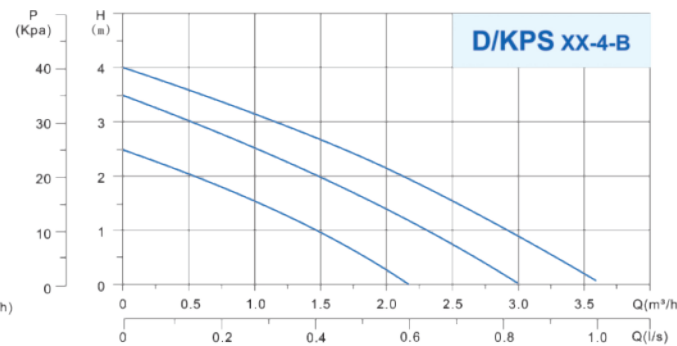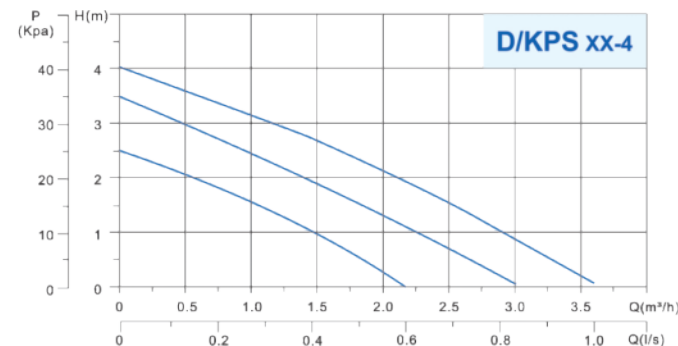

技术参数 Technical Parameter

型号 Model	功率 Power (W)	扬程 Head Max (m)	流量 Flow (m³/h)	电流Current(A)		进出口口径 Diameter (mm)	L (mm)	B (mm)	H (mm)	H1 (mm)	外包装尺寸 Package size (cm)	装箱 个数 CTN/PCS	毛重 G.W. (Kg)
				220V/50HZ	127V/60HZ								
D/KPS15-4-130	72/53/38	4.3/3.5/2.8	3.0/2.1/1.2	0.29	0.66	G1"	130	125	130	105	28.8*28*29.6	8	20.3
D/KPS15-4-130B(S)													20.4
D/KPS20-4-130	72/53/38	4.3/3.5/2.8	3.12/2.28/1.32	0.29	0.66	G1 1/4"	130	125	130	105	28.8*28*29.6	8	21.7
D/KPS20-4-130B(S)													21.8
D/KPS25-4-130	72/53/38	4.3/3.5/2.8	3.2/2.6/1.3	0.29	0.66	G1 1/2"	130	125	130	105	28.8*28*29.6	8	23.2
D/KPS25-4-130B(S)													23.3
D/KPS25-4-180	72/53/38	4.3/3.5/2.8	3.2/2.6/1.3	0.29	0.66	G1 1/2"	180	125	130	105	39*27.5*30	8	27
D/KPS25-4-180B(S)													27.2
D/KPS32-4-180	72/53/38	4.3/3.5/2.8	3.3/2.7/1.4	0.29	0.66	G2"	180	125	130	105	39*27.5*30	8	28
D/KPS32-4-180B(S)													28.2
D/KPS15-6-130	100/70/55	6.0/5.2/4.0	3.2/2.4/1.5	0.39	0.9	G1"	130	125	130	105	28.8*28*29.6	8	20.3
D/KPS15-6-130B(S)													20.4
D/KPS20-6-130	100/70/55	6.0/5.2/4.0	3.3/2.5/1.6	0.39	0.9	G1 1/4"	130	125	130	105	28.8*28*29.6	8	21.7
D/KPS20-6-130B(S)													21.8
D/KPS25-6-130	100/70/55	6.0/5.2/4.0	3.4/2.7/1.8	0.39	0.9	G1 1/2"	130	125	130	105	28.8*28*29.6	8	23.2
D/KPS25-6-130B(S)													23.3
D/KPS25-6-180	100/70/55	6.0/5.2/4.0	3.4/2.8/1.9	0.39	0.9	G1 1/2"	180	125	130	105	39*27.5*30	8	27
D/KPS25-6-180B(S)													27.2
D/KPS32-6-180	100/70/55	6.0/5.2/4.0	3.6/2.6/1.3	0.39	0.9	G2"	180	125	130	105	39*27.5*30	8	28
D/KPS32-6-180B(S)													28.2

D/KPS
Class B Circulation Pump




D/KPS

冷热水循环屏蔽泵
COLD AND HOT WATER CIRCULATION SHIELD PUMP


D/KPS
Class B Circulation Pump

产品概述 Product overview

电源电压 Supply voltage: 1x230V-50/60Hz
最高扬程 Head rate, Hmax: 6-12m
最大流量 Flow rate, Qmax: 1.5-8.4m³/h
液体温度 Liquid temperature: +2°C to +95°C (TF95)
功率范围 Power Range: 87-280W
环境温度 Ambient temperature: 0°C to +40°C
外壳防护等级 Enclosure protection class: IP44
绝缘等级 Insulation class: H

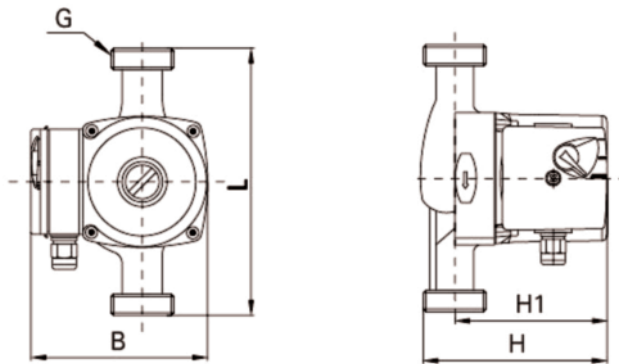

性能曲线 Performance Curve

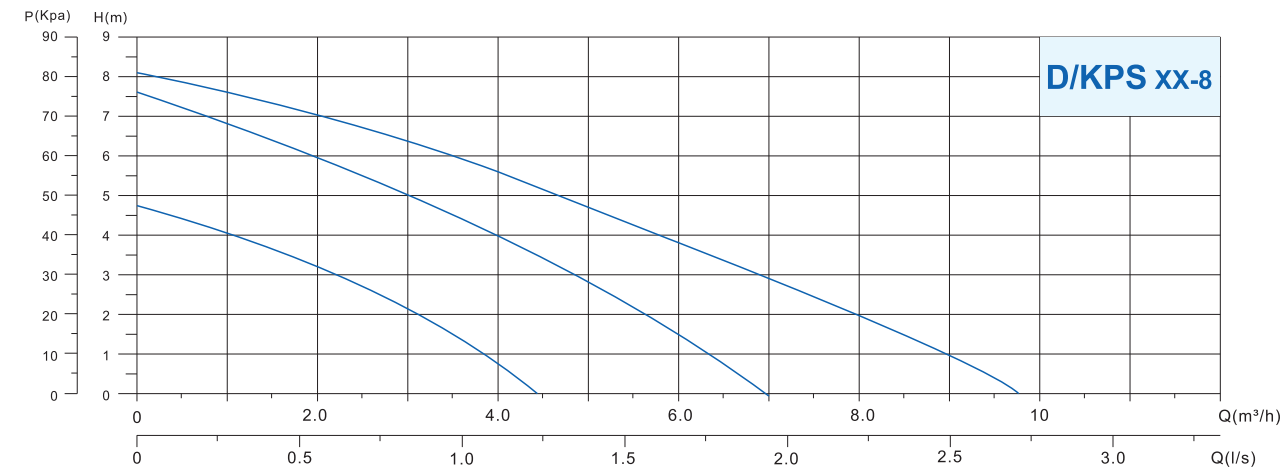

技术参数 Technical Parameter

型号 Model	功率 Power (W)	扬程 Head (m)	流量 Flow (m³/h)	电流Electric current(A)		进出口口径 Diameter(mm)	L (mm)	B (mm)	H (mm)	H1 (mm)	毛重 weight (kg)	外包装尺寸 Package size (cm)	包装 Package (pcs)
				220V/50HZ	127V/60HZ								
D/KPS25-8-180	245/180/130	8.0/6.0/4.2	7.5/4.8/2.5	1.2	2.32	G1 1/2"	180	125	170	145	27	38.5x33.5x21	4
D/KPS32-8-180	260/190/135	8.0/6.0/4.2	8.4/6.4/2.7	1.2	2.32	G2"	180	125	170	145	28	38.5x33.5x21	4
D/KPS20-12-180	280/220/150	12/9.0/6.0	4.2/2.7/1.6	1.27	2.2	G1"	180	125	170	145	27	38.5x33.5x21	4
D/KPS15-6F	140/119/87	6.0/5.4/4.0	3.72/2.52/1.5	-	1.1	-	180	125	155	100	30.4	28.8x28x29.6	8



高效叶轮
High efficiency impeller



屏蔽电动机
Shielded motor



低噪音
Low noise



陶瓷轴
Ceramic bearing



D/KPA

冷热水循环屏蔽泵

COLD AND HOT WATER CIRCULATION SHIELD PUMP

产品概述 Product overview

电源电压 Supply voltage: 1x230V-50/60Hz

最高扬程 Head rate, Hmax: 9-15m

最大流量 Flow rate, Qmax: 1.5-3.9m³/h



液体温度 Liquid temperature: +2°C to +95°C (TF95)

功率范围 Power Range: 110-350W


环境温度 Ambient temperature: 0°C to +40°C

外壳防护等级 Enclosure protection class: IP44

绝缘等级 Insulation class: H

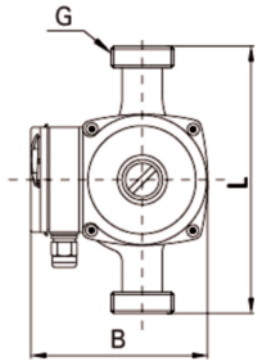



性能曲线 Performance Curve

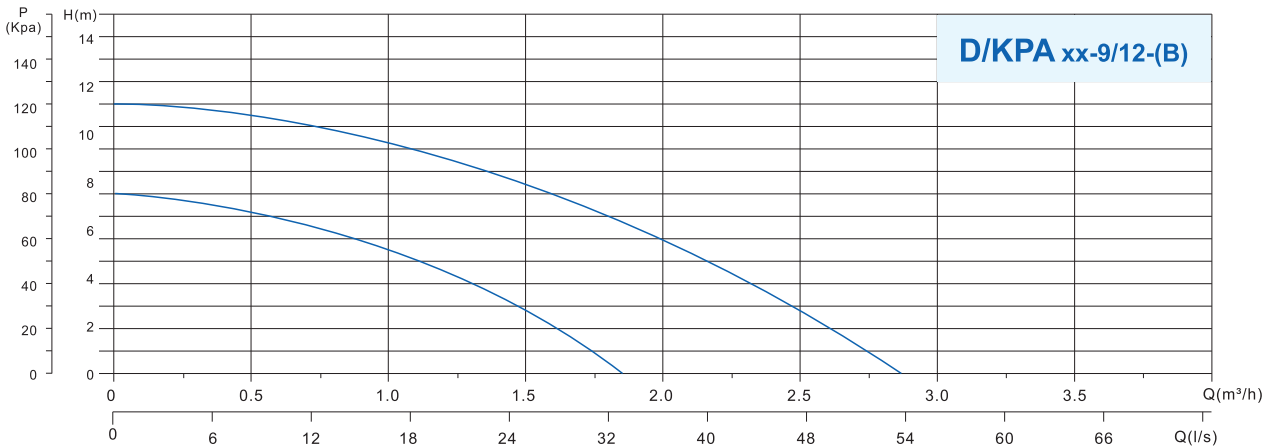

技术参数 Technical Parameter

型号 Model	功率 Power (W)	扬程 Head Max (m)	流量 Flow (m³/h)	电流Current(A)		进出口口径 Diameter (mm)	L (mm)	B (mm)	H (mm)	H1 (mm)	外包装尺寸 Package size (cm)	装箱 个数 CTN/PCS	毛重 G.W (Kg)
				220V/50HZ	127V/60HZ								
D/KPA15-9-160	110	9	1.5	0.5	1.03	G3/4	160	120	140	115	39*31*32	8	23.5
D/KPA15-9-160B(S)													23
D/KPA25-12-200	260	12	3	1.18	2.35	G1	200	120	160	135	45*31*20	4	20.5
D/KPA25-12-200B(S)								155					20
D/KPA25-15-200	350	15	3.9	1.59	3.15	G1	200	155	160	135	45*31*20	4	20
D/KPA25-15-200B(S)													20

配件 *SPARE PART*

Pipe Fitting 管件					
Pump body 泵体	Pump body thread size 泵体螺纹尺寸	Rp		R	
15-XX	G3/4"			G1/2"	
15-XX-B				G1/2"	
15-XX	G1"				G3/4"
15-XX-B				G1/2"	G3/4"
20-XX	G1 1/4"				G1"
20-XX-B					G1"
25-XX	G1 1/2"	G1"			G1 1/4"
25-XX-B		G1"			
32-XX	G2"	G1 1/4"	G1 1/2"		
32-XX-B			G1 1/2"		

